

10" Rough-in

### Features:

### □ AV-20-817

- Vitreous China
- 17" Tall, ErgoHeight® ADA Elongated Bowl
- 10" Rough-in
- Featuring the "PowerClean" Flush System
- Fluidmaster 400A Fill Valve
- 3" flush valve for maximum water force
- Corrosion resistant Fluidmaster flapper
- Extra-Large Dual fed siphon jets for high power bowl clearing
- Powerful, 100% glazed, 2" trapway to quickly siphon waste from bowl
- Double nut, multi-point tank-to-bowl mounting system for tool-free installation
- Chrome metal tank lever with solid durable brass arm
- Toilet seat not included
- Available April 2018

## **Technical Information:**

## **Included Components:**

□ Combination AV-20-817
□ Bowl AB-21-828
□ Tank AL-28-895

# Other Tank Options: (bowl to be purchased separately)

□ Insulated Tank

☐ Tank with Right Hand Lever

□ Insulated Tank with Lid Locking Device

### **Fixtures:**

Configuration	Two-piece, ErgoHeight® ADA Elongated Bowl
Water per Flush	1.6 gpf (6.0 lpf)
Rough-In	10"
Height	31 <sup>3</sup> /4"
Width	17 <sup>15</sup> /16 "
Depth	27 7/8"
Trapway	2"
Large Water Surface	8 <sup>11</sup> /16" x 6 <sup>5</sup> /16"
Shipping Weight	88 lbs

# Accessories: (to be purchased separately)

ĺ	Soft Closed Toilet Seat	00-217
- 1	Soft Closed Follet Seat I	99-215


### Colors only:

•White

•Other: Refer to Price Book for additional colors

## Warranty:

• 10 Year Warranty, Limited Lifetime on Vitreous China

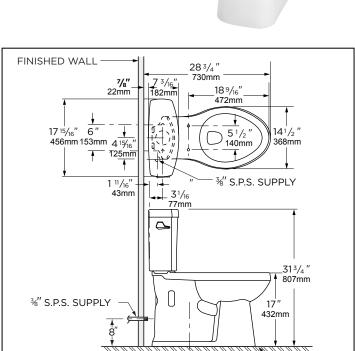

10"

254mm

8 9/16

218mm

152mm

TWO SLOTS (½" x¾")



151/4

387mm

 $\angle$   $\P$  of WASTE OUTLET



101/2"



**FINISHED** 

**FLOOR** 



#### IMPORTANT

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A 112.19.2 THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.6gpf (6 Lpf) OR LESS.



11/17