
Pléo® Wall-Mount Toilet

FEATURES

- One-piece, wall-mount toilet
- Compact elongated bowl offers comfort while occupying the same space as a round-front bowl
- Skirted bowl allows for easy cleaning and eliminates potential debris build-up
- Adjustable durable steel frame carrier allows bowl to be positioned 15-3/8" (391 mm) to 28-1/2" (724 mm) from floor
- Dual-flush actuator offers a choice of 1.0 gpf (3.8 lpf) or 1.6 gpf (6.1 lpf)

- CODES/STANDARDS **APPLICABLE**
- P70361, P70362, P70364,
- ASME A112.19.2/CSA B45.1
- ASME A112.19.14
- EPA WaterSense®
- Combination P70360



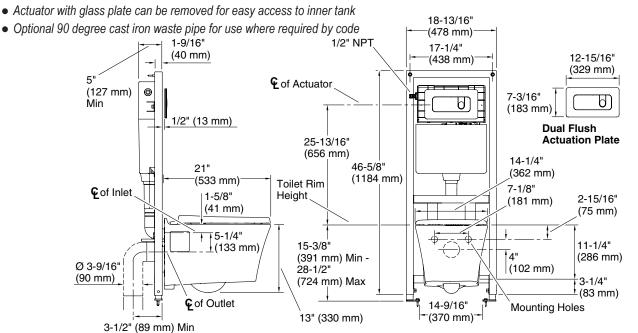

PRODUCT INFORMATION				
Water per flush	1.6 gpf (6.1 L) or 1.0 gpf (3.8 L)			
Passageway	3" (76 mm)			
Water area	4-1/2" (114 mm) x 5-1/2" (140 mm)			
Seat post hole centers	5-1/2" (140 mm)			

4" (102 mm) Max

INSTALLATION NOTES
Install this product according to the installation guide.
Installation requires 2x6 framing.
The recommended install height from the finished floor to the toilet rim is 16-1/8" (410 mm).
In-wall tank and carrier system install in wall opening
5-1/2"(140 mm) x 19" (483 mm) x 50" (1270 mm) minimum.
Refer to manufacturer and local codes for flush valve requirements.

SPECIFIED MODEL							
Model	Description	Finishes					
P70360-00	Pléo Wall-Mount Combo, Bowl and Carrier System	□ 0 Stucco White					
P70361-00	Pléo Wall-Mount Bowl	☐ 0 Stucco White					
P70362-00	In-Wall Tank and Carrier System	□ NA					
Required Accessory							
P70364-00	Dual-Flush Wall-Mount Toilet Actuator	☐ CP Polished Chrome	☐ AD N	lickel Silver	☐ AG Brushed Nickel		
		☐ LB Bronze	☐ GN (Gunmetal	W7 Black Nickel		
Recommended Accessory							
P70363-00	Modern Toilet Seat with Slow-Close, Quick Hinge Release	☐ 0 Stucco White		☐ 96 Linen			
Optional Accessory							
1222845	Cast Iron Waste Pipe Elbow, 90 Degree	□ NA					

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.